

Tenda



All for better networking.

i25

AC1350 Wave2 Gigabit Access Point

www.tendacn.com



Link
More

i25

AC1350 Wave2 Gigabit Access Point

Products Description

Compliant with IEEE 802.11ac, i25 is a gigabit dual-band ceiling access point. Powered by MU-MIMO technology, a single i25 can simultaneously communicate with multiple clients, greatly improving throughput and enhancing user experience. With high power RF and renovative design of antennas that are optimized for long distance scenarios, i25 offers reliable long-distance wireless solutions for indoor space with signal barriers, such as factory warehouses and hotels.

Key Feature

- High power for broader and stable coverage.
- Gigabit internet connection for ultra-fast experience.
- Up to 1317 Mbps dual-band data rate.
- Centralized management by all TENDA ACs and enterprise routers.

Product Features



High power

Up to 1167 Mbps dual-band data rate, and the 1000 Mbps Ethernet port let you enjoy ultra-fast internet connections.



IEEE 802.11ac Wave2

Powered by MU-MIMO technology, a single i25 can communicate with multiple wireless clients at one time, letting you enjoy higher throughput and better experience.



Dual-band for more connected clients

i25 allows clients that support either 2.4 GHz or 5 GHz band, or both to connect to it at the same time, tripling the quantity of connected clients of traditional single-band AP.



Gigabit internet connection for ultra-fast experience

Up to 1317 Mbps dual-band data rate and the Gigabit Ethernet port offer you ultra-fast internet connections.

Product Features



Built-in RF for intelligent optimization

Featuring various anti-interference algorithms, the built-in RF enables i25 to evenly allocate bandwidth resources for multiple users, filter interference, and optimize data rate, offering you a guaranteed signal strength and reliable wireless experience.



VLAN tagging for SSID

i25 allows you to set multiple SSIDs and add VLAN tags for SSIDs, thus protecting your network.



Standard PoE sourcing and DC power supply for easy deployment

You can use an IEEE 802.3at-compliant PoE sourcing equipment, or a 12V DC power adapter to power on i25.




Centralized management


You are allowed to configure and manage multiple i25 in a centralized manner through all TENDA access controllers (AC) and enterprise routers that include AC functionality, and enjoy simple management, configuration and monitoring of all access points.

Application Scenarios

Villa/Large House

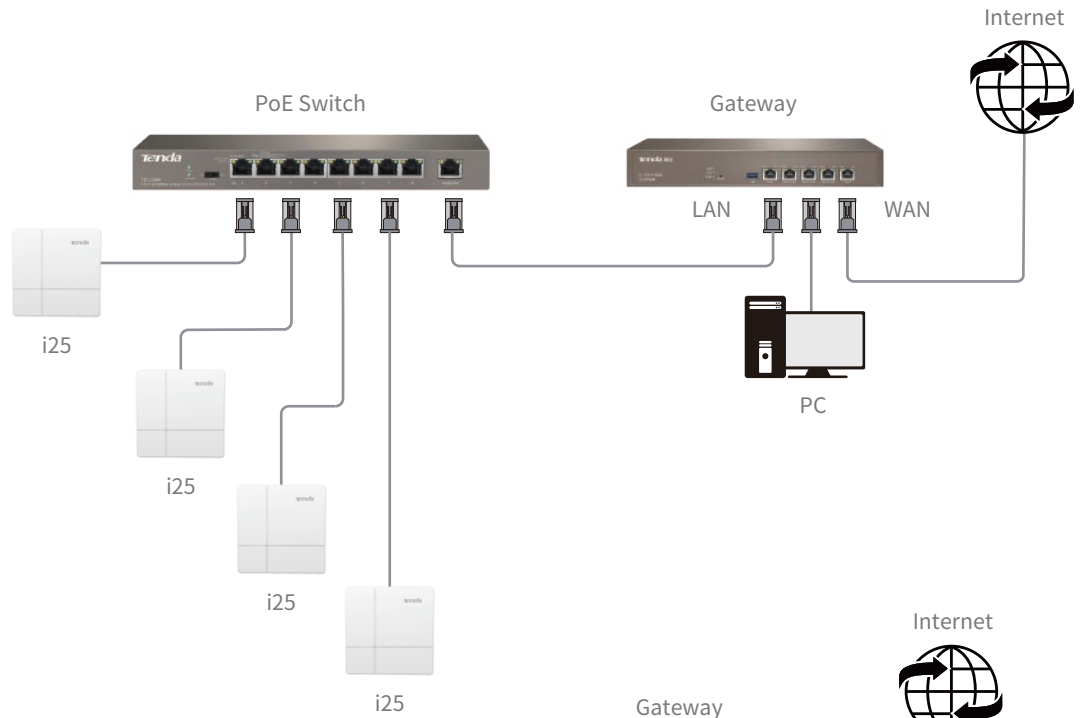

Hotel/Resort

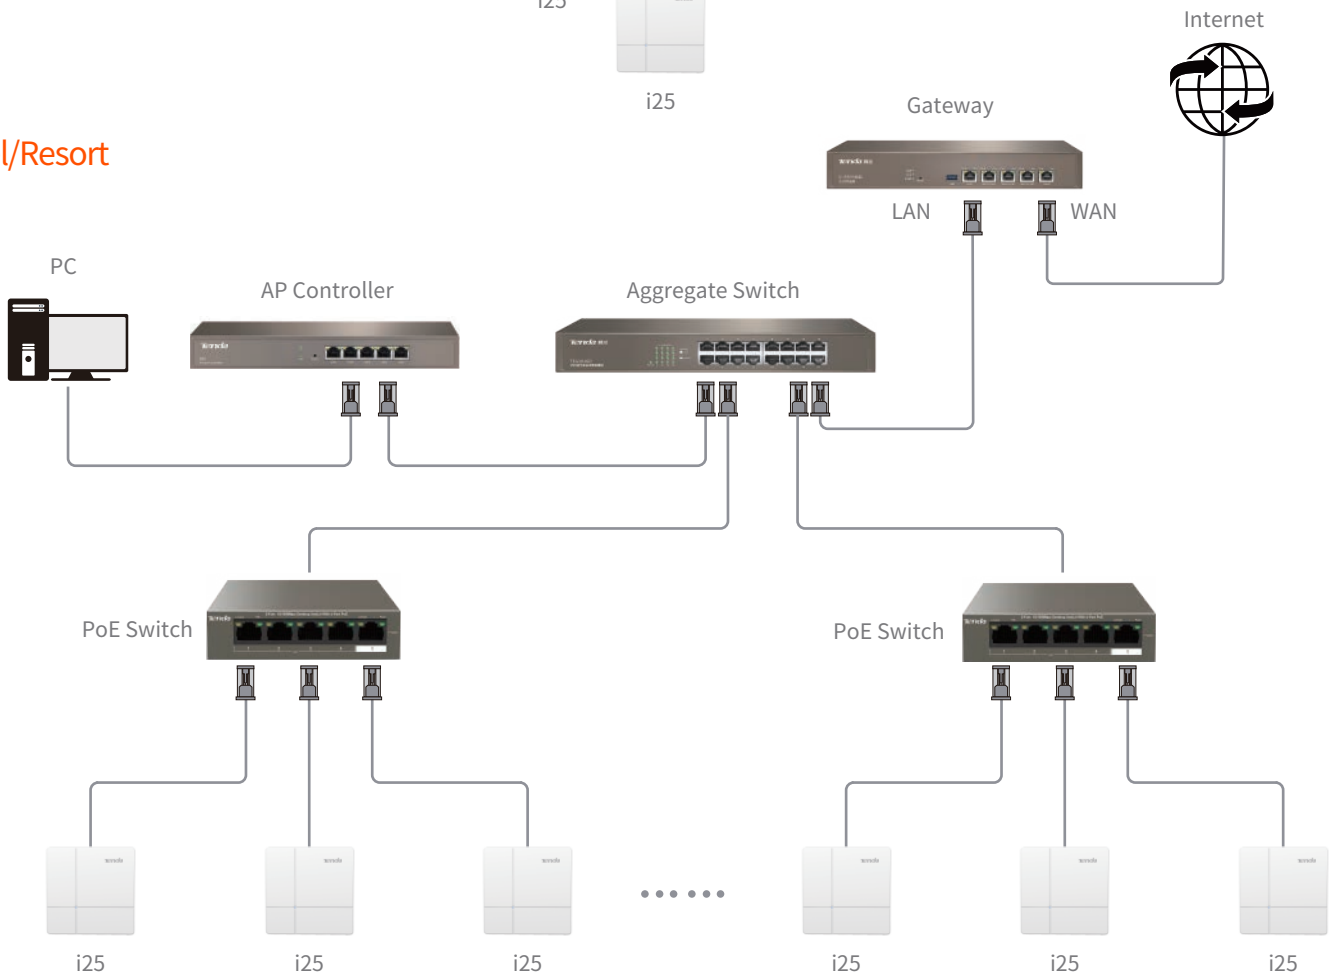

Product specifications

| Product Information | |
|-------------------------|---|
| Product Information | i25 |
| Appearance | Ceiling |
| Dimensions | 178 mm * 178 mm * 38 mm |
| Hardware Specifications | |
| Frequency band | 2.400 – 2.4835 GHz, 5.150 – 5.250 GHz |
| Wireless standards | IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.11ac |
| 2.4 GHz data rate | 1 - 450 Mbps |
| 5 GHz data rate | 6 - 867 Mbps |
| Ethernet port | 1*10/100/1000 Base-TX RJ45 port |
| Button | 1*Reset |
| LED indicator | 1*Power |
| Max. power consumption | Full-load 13.5W |
| Power supply standard | IEEE 802.3at PoE, DC 12V 1.5A |
| Software Specification | |
| Operating modes | AP, Client+AP |
| Hide SSID | Supported |
| Max. No. of SSID | 2.4 GHz: 8; 5 GHz: 4 |
| Max. connected clients | 2.4 GHz: 128; 5 GHz: 256 |
| WEP | Supported |
| WPA-PSK | AES/TKIP |
| WPA2-PSK | AES/TKIP |
| WPA | Supported |
| WPA2 | Supported |
| Access control | MAC address-based |

Product specifications

| | |
|---------------------------------------|----------------------|
| Adjustable power transmit | Supported |
| Frequency analysis | Supported |
| AP isolation | Supported |
| Connected clients control | Supported |
| RSSI threshold | Supported |
| WMM | Supported |
| VLAN tagging for SSID | Supported |
| Antenna gain | 4 dBi |
| 2.4 GHz Max. output power | 23 +/- 1.5 dBm |
| 5 GHz Max. output power | 26 +/-1.5 dBm |
| 802.11b RX sensitivity | -94 dBm |
| 2.4 GHz 802.11n (MCS7) RX sensitivity | -75 dBm |
| 5 GHz 802.11a RX sensitivity | -98 dBm |
| 5 GHz 802.11n (MCS7) RX sensitivity | -79 dBm |
| Prefer 5 GHz | Supported |
| LED indicator control | Supported |
| Diagnostics tool | Ping, Traceroute |
| Scheduled reboot | Supported |
| Reboot at specified interval | Supported |
| Management | Web UI |
| System logs | Supported |
| Firmware upgrade | Local and AC upgrade |
| Reboot | Local and AC reboot |
| Reset | Local and AC reset |

Product specifications

| | |
|----------------------|-----------|
| Backup configuration | Supported |
|----------------------|-----------|

| | |
|-----------------------|-----------|
| Restore configuration | Supported |
|-----------------------|-----------|

Operating Environment

| | |
|--------------------------|---------------|
| Default login IP address | 192.168.0.254 |
|--------------------------|---------------|

| | |
|-------------------|-------|
| Default user name | admin |
|-------------------|-------|

| | |
|------------------|-------|
| Default password | admin |
|------------------|-------|

| | |
|-----------------------|--------------|
| Operating temperature | -10°C - 45°C |
|-----------------------|--------------|

| | |
|--------------------|--------------------------------|
| Operating humidity | (10% - 90%) RH, non-condensing |
|--------------------|--------------------------------|

| | |
|---------------------|------------|
| Storage temperature | -30°C - 70 |
|---------------------|------------|

| | |
|------------------|--------------------------------|
| Storage humidity | (10% - 90%) RH, non-condensing |
|------------------|--------------------------------|

Certificates

| | |
|--------------|-------------|
| Certificates | CE\FCC\RoHS |
|--------------|-------------|

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int' IE-City,
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:support@tenda.com.cn

Tel:+86-755-2765 7098

Fax:+86-755-2765 7178

PC:518055



Like us on Facebook



Follow us on Twitter